

Double Hipped Rooflights



Our rooflights are constructed from aluminium, and are fully thermally broken giving superior thermal efficiency coupled with low maintenance and stylish design.

We offer quality powder coated finishes to any standard RAL colour of you choice including dual colour (i.e. internal/external different colours).










Different internal and external profile finishes are available including square, ornate and raked features to suit your application.

Our rooflights are made to your specific size with pitches ranging from 15 to 45 degrees (30 degrees is our standard).





Our rooflights can accommodate a multitude of glazing options from 24mm double glazed to 50mm triple glazed units.

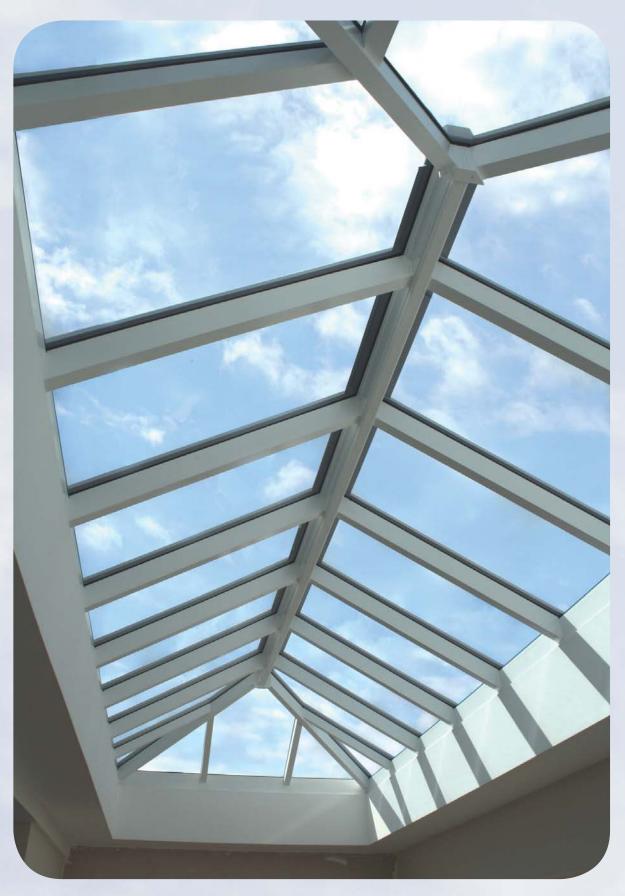

Double hipped rooflight with square bar feature 6.5 metres long by 2.5 metres wide



With our sleek yet robust components, large bar centres are achievable delivering maximum daylight penetration.

Rooflight opposite, displays our square bar feature which gives the look of traditional timber without the maintenance.

All our rooflights can accommodate our opening vents.







Ref: 14169 (978) Banks Design

Double Hipped Rooflight
Int. Dimensions: 1500mm x 1200mm
30 Degree Pitch

Colour : Ral 7015 Matt







Ref: 12189 (826) Treen

Double Hipped Rooflight

Int. Dimensions: 1980mm x 1750mm

30 Degree Pitch

Colour: Ral 9910 Satin

1 Electrically Operated Vent

28mm Pilkington Activ Solar Controlled Glazing (Grey)







Ref: 9844 (524) Higgins

Double Hipped Rooflight

Int. Dimensions: 2700 m x 1800mm

30 Degree Pitch

Colour: Ral 9910 Satin

One Electrically Operated Vent







Ref: 20655 (1515) Mcquillan

Double Hipped Rooflight
Int. Dimensions: 3000mm x 2000mm

30 Degree Pitch

Dual Colour: Ral 7015 Satin Ext / Ral 9910 Satin Int







Ref: 1476 / 20767 Waters

Double Hipped Rooflight
Int. Dimensions: 3210mm x 1610mm

30 Degree Pitch

Dual Colour : Ral 7043 Matt Ext / Ral 9910 Satin Int 28mm Pilkington Activ Solar Controlled Glazing (Neutral Grey)







Ref: 1528 (21233) Kirkdale

Double Hipped Rooflight Int. Dimensions : 3515mm x 1645mm

30 Degree Pitch

Dual Colour: Ral 6006Matt Ext / Ral 9910 Satin Int

2 Electrically Operated Vent





Pictures by :- http://www.helenjolliffephotography.com

Architect:- tilly@adonia-architectural.co.uk http://www.adonia-architectural.co.uk



Ref: 1068 (15045) Clarke

Double Hipped Rooflight

Int. Dimensions: 4000mm x 2000mm

30 Degree Pitch

Dual Colour : Ral 7016 Matt 2 Electrically Operated Vent 28mm Pilkington Activ Glazing (Clear)







Ref: 11952 (839) Scicluna

Double Hipped Rooflight Int. Dimensions : 4000mm x 2000mm

30 Degree Pitch

Dual Colour : Ral 7015 Satin Ext / Ral 9016 Satin Int







Ref: 12532 (834) Hackworth

Double Hipped Rooflight

Int. Dimensions: 4630mm x 3030mm

30 Degree Pitch

Colour: Ral 7022 Matt

28mm Pilkington Activ Solar Controlled Glazing (Blue)







Ref: 9951 (558) Spyrka

Double Hipped Rooflight

Int. Dimensions: 5000mm x 3000mm

30 Degree Pitch

Dual Colour: Ral 9005 Matt Ext / Ral 9910 Satin Int

1 Electrically Operated Vent







Ref: 11172 (903) Maynecol

Double Hipped Rooflight Int. Dimensions : 5200mm x 4300mm

> 30 Degree Pitch Colour : Ral 9910 Satin 4 Electrically Operated Vent 28mm Pilkington Std Glazing







Ref: 108371 (673) GT Wall

Double Hipped Rooflight

Int. Dimensions: 6000mm x 2200mm

30 Degree Pitch

Colour : Ral 9910 Satin 4 Electrically Operated Vent 28mm Pilkington Std Glazing

Roof Vents





Roof vents are purpose made to your exact requirements and can accomodate glass thicknesses from 6mm to 50mm (28mm is our standard).

Powder Coated to any standard RAL colour of your choice.

Manual, 230 Volt or 24 Volt electrical operation options avaliable.



100T Digital control panel with rain sensor and thermostat



Electrical chain motor




Manual worm gear



On/Off Retractive switch



Glass Options

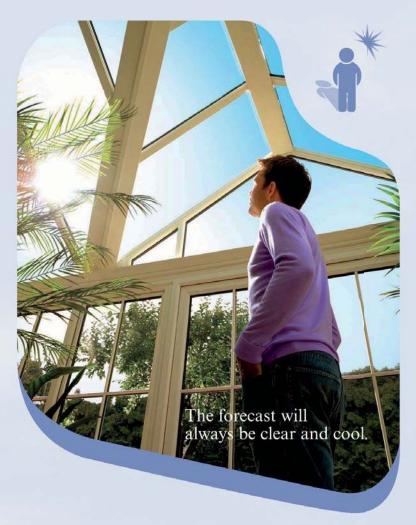

There's an abundance of different glass specifications to choose from.


Our preferred supplier is Pilkington Glass as they are an established company and household name.


Our standard specification for glass is 28mm Clear toughened double glazed units (with a centre pane U value of 1.2 W/m).

However, we do offer a 50mm triple-glazed unit option (with a centre pane U value of 0.7 w/m2)


Glass upgrades such as Activ Self Cleaning and also Activ Blue or Neutral (Grey) Solar controlled options are available just to name a few.

Glass samples and more technical information available on request.









Clear Activ

Solar Blue Activ

Solar Neutral Grey Activ















































